

Servo amplifier

mcDSA-E20

Article number: 1511097



Picture similar

Technical data

Supply voltages		Incremental encoder	
Electronic supply voltage Ue* ¹	9..30 V	Type	incremental
Electronic current consumption@ Ue=24V* ²	typ. 55 mA	Signals	A,/A,B,/B,Inx,/Inx
Power supply voltage Up* ³	9..60 V	Max. frequency (per channel)	500 kHz
Output current		Input voltage (24V tolerant)	0..5 V
Max. output current	50 A	Signal type	differential, open collector, single ended
Continuous output current @ Up=24V* ⁴	30 A	Hall sensors	
Continuous output current @ Up=48V* ⁴	21 A	Signals	H1,/H1,H2,H3,/H3
PWM		Max. frequency (per channel)	10 kHz
Output voltage	90% Up	Input voltage (24V tolerant)	0..5 V
PWM frequency	25, 32* ⁵ , 50 kHz	Signal type	differential, open collector, single ended
Mechanical		Digital inputs	
Size LxWxH	111 x 100 x 31 mm	Number - digital inputs	4 (Din0..3)
Weight	380 g	Low voltage	0..5 V
Environment		High voltage	8..30 V
Protection class	IP20	Digital outputs	
Ambient temperature (operation)* ⁶	-40..55 °C	Number	1 (Dout0)
Ambient temperature (storage)	-40..85 °C	Continuous output current	1.5 A
Rel. humidity (non-condensing)	5..90 %	Load	resistive, inductive
CAN bus		Output voltage	Electronic supply voltage Ue positive switching
Protocol	DS301	Analog inputs	
Device profile	DS402	Number	1 (Ain0)
Max. baudrate	1 Mbit/s	Signal type	0..10 V, 12 Bit, single ended
CAN specification	2.0B		
Galvanically isolated	no		
Sensor supply (Encoder/Hall)			
Output voltage	5 V		
Max. output current	0.2 A		

*¹ No reverse polarity protection, the destruction limit is at overvoltage of >= 33V or short-term peak voltage of 37V < 1s*² power amplifier switched off, 5V output (sensor supply) is free*³ No reverse polarity protection, the destruction limit is at overvoltage of >= 80V*⁴ connector cable with max. possible cable cross-section, PWM frequency 25 kHz, ambient temperature 40 °C (t > 40 °C derating), RMS current: 30 A → 24.5 Aeff, 21 A → 17.1 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*⁵ default value*⁶ Hex-Switches should be not used at ambient temperature < -25°C (setting of node ID only possible by firmware parameters)

Additional technical data are available in mcManual.




miControl® GmbH

Chausseestraße 34

14979 Großbeeren (bei Berlin)

Copyright 2024 by miControl® - Modifications and errors excepted
mcDSA-E20 - PV1.12.00.00 / DV1.00.00.06
Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

Scheme

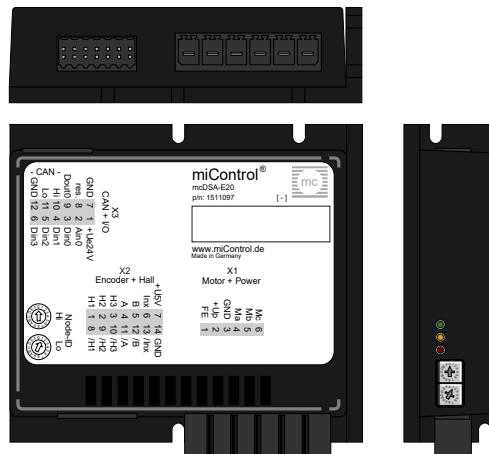

©2023 by miControl

Terminal assignment

X1	Motor	
1	FE	Functional earth
2	+Up	Power supply voltage
3	GND	Ground for power supply voltage
4	Ma	Motor phase A
5	Mb	Motor phase B
6	Mc	Motor phase C
X2	Hall and inc. encoder	
1	H1	Hall sensor 1
2	H2	Hall sensor 2
3	H3	Hall sensor 3
4	A	Inc. encoder, A channel
5	B	Inc. encoder, B channel
6	Inx	Inc. encoder, index channel
7	+U5V	5V output voltage for sensor supply Sensors: encoder, hall
8	/H1	Hall sensor 1 inverted
9	/H2	Hall sensor 2 inverted
10	/H3	Hall sensor 3 inverted
11	/A	Inc. encoder, A channel inverted
12	/B	Inc. encoder, B channel inverted
13	/Inx	Inc. encoder, index channel inverted
14	GND	Ground for sensor supply Notice: don't connect with system GND
X3	I/O's and CAN	
1	+Ue24V	Electronic supply voltage
2	Ain0	Analog input 0
3	Din0	Digital input 0
4	Din1	Digital input 1
5	Din2	Digital input 2
6	Din3	Digital input 3
7	GND	Ground for electronic supply voltage
8	res.	Reserved
9	Dout0	Digital output 0
10	CAN Hi	CAN High
11	CAN Lo	CAN Low
12	CAN GND	CAN Ground