

Servo amplifier

mcDSA-E47

Article number: 1511153



Picture similar

Technical data

Supply voltages		Sensor supply (Encoder)	
Electronic supply voltage Ue* ¹	9..30 V	Output voltage	5 V
Electronic current consumption@ Ue=24V* ²	typ. 60 mA	Max. output current	0.2 A
Power supply voltage Up* ³	9..60 V	Encoder	
Output current		Type	sin / cos
Max. output current	50 A	Signals	+Sin,-Sin,+Cos,-Cos
Continuous output current @ Up=24V* ⁴	10 A	Resolution	13 bit per sine period
Continuous output current @ Up=48V* ⁴	8.5 A	Input voltage	1 V peak-peak, differential
PWM		Signal type	sine/cosine, analog, differential
Output voltage	100% Up	Digital inputs	
PWM frequency	25, 32* ⁵ , 50 kHz	Number - digital inputs	7 (Din0..6)
Mechanical		Low voltage	0.5 V
Size LxWxH	110 x 23 x 77 mm	High voltage	8..30 V
Weight	110 g	Digital outputs	
Environment		Number	2 (Dout0..1)
Protection class	IP20	Continuous output current	1.5 A
Ambient temperature (operation)* ⁶	-40..70 °C	Load	resistive, inductive
Ambient temperature (storage)	-40..85 °C	Output voltage	Electronic supply voltage Ue
Rel. humidity (non-condensing)	5..90 %	Signal type	positive switching
CAN bus		Analog inputs	
Protocol	DS301	Number	2 (Ain0..1)
Device profile	DS402	Signal type - Ain0	+/- 10 V, 12 Bit, differential
Max. baudrate	1 Mbit/s	Signal type - Ain1	+/- 10 V, 12 Bit, single ended
CAN specification	2.0B		
Galvanically isolated	no		

*¹ No reverse polarity protection, the destruction limit is at overvoltage of >= 33V or short-term peak voltage of 37V < 1s*² power amplifier switched off, 5V output (sensor supply) is free*³ No reverse polarity protection, the destruction limit is at overvoltage of >= 80V*⁴ connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C (t >40 °C derating), RMS current: 10 A → 8.2 Aeff, 8.5 A → 6.9 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*⁵ default value*⁶ Hex-Switches should be not used at T < -25°C (setting of node ID only possible by firmware parameters)

Additional technical data are available in mcManual.




miControl® GmbH

Chausseestraße 34

14979 Großbeeren (bei Berlin)

Copyright 2024 by miControl® - Modifications and errors excepted
mcDSA-E47 - PV1.13.00.00 / DV1.00.00.06
Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

Scheme

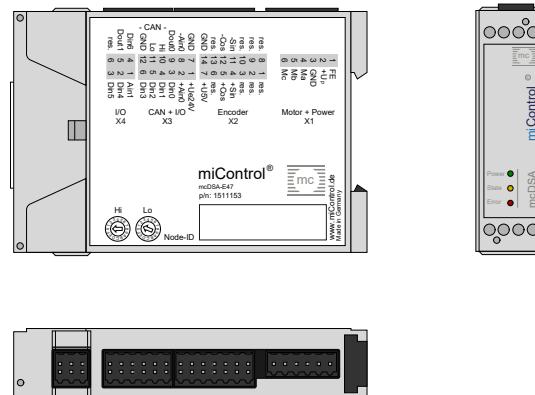

©2023 by miControl

Terminal assignment

X1			Motor		
1	FE	Functional earth			
2	+Up	Power supply voltage			
3	GND	Ground for power supply voltage			
4	Ma	Motor phase A			
5	Mb	Motor phase B			
6	Mc	Motor phase C			
X2			Encoder		
1	res.	Reserved			
2	res.	Reserved			
3	res.	Reserved			
4	+Sin	Encoder, plus sine signal			
5	+Cos	Encoder, plus cosine signal			
6	res.	Reserved			
7	+U5V	5V output voltage for sensor supply Sensors: encoder			
8	res.	Reserved			
9	res.	Reserved			
10	res.	Reserved			
11	-Sin	Encoder, minus sine signal			
12	-Cos	Encoder, minus cosine signal			
13	res.	Reserved			
14	GND	Ground for sensor supply Notice: don't connect with system GND			
X3			I/O's and CAN		
1	+Ue24V	Electronic supply voltage			
2	+Ain0	Analog input 0, plus			
3	Din0	Digital input 0			
4	Din1	Digital input 1			
5	Din2	Digital input 2			
6	Din3	Digital input 3			
7	GND	Ground for electronic supply voltage			
8	-Ain0	Analog input 0, minus			
9	Dout0	Digital output 0			
10	CAN Hi	CAN High			
11	CAN Lo	CAN Low			
12	CAN GND	CAN Ground			

X4			I/O's
1	Ain1	Analog input 1	
2	Din4	Digital input 4	
3	Din5	Digital input 5	
4	Din6	Digital input 6	
5	Dout1	Digital output 1	
6	res.	Reserved	