

Servo amplifier

mcDSA-E67-EtherCAT

Article number: 1505043



Picture similar

Technical data

Supply voltages		Sensor supply (Encoder)	
Electronic supply voltage Ue* ¹	9..30 V	Output voltage	5 V
Electronic current consumption@ Ue=24V* ²	typ. 70 mA	Max. output current	0.2 A
Power supply voltage Up* ³	9..60 V	Encoder	
Output current		Type	sin / cos
Max. output current	15 A	Signals	+Sin,-Sin,+Cos,-Cos
Continuous output current @ Up=24V* ⁴	5 A	Resolution	13 bit per sine period
Continuous output current @ Up=48V* ⁴	4.3 A	Input voltage	1 V peak-peak, differential
PWM		Signal type	sine/cosine, analog, differential
Output voltage	100% Up	Digital inputs	
PWM frequency	25, 32* ⁵ , 50 kHz	Number (+/-30V tolerant)	2 (Din0..1)
Mechanical		Number (0..30V tolerant)	1 (Din2)
Size LxWxH	74 x 45 x 38 mm	Low voltage	0.5 V
Weight	60 g	High voltage	8..30 V
Environment		Notice	Din2 parallel with Dout0* ⁶
Protection class	IP20	Digital outputs	
Ambient temperature (operation)	-25..70 °C	Number	1 (Dout0)
Ambient temperature (storage)	-25..85 °C	Continuous output current	1.5 A
Rel. humidity (non-condensing)	5..90 %	Load	resistive, inductive
CAN bus		Output voltage	Electronic supply voltage Ue
Protocol	DS301	Signal type	positive switching
Device profile	DS402	Notice	Dout0 parallel with Din2
Max. baudrate	1 Mbit/s	Analog inputs	
CAN specification	2.0B	Number	1 (Ain0)
Galvanically isolated	no	Signal type	+/- 10 V, 12 Bit, single ended
EtherCAT			
Type	EtherCAT Slave		
Physical layer	100 Base-Tx EtherCAT		
Bus controller	ET1100		
Max. baudrate	100 Mbit/s		
Number of ports	2xRJ45 (In,Out)		
Protocol	CoE (CANopen over EtherCAT)		

*¹ No reverse polarity protection, the destruction limit is at overvoltage of >= 33V or short-term peak voltage of 37V < 1s*² power amplifier switched off, 5V output (sensor supply) is free, bus not connected*³ No reverse polarity protection, the destruction limit is at overvoltage of >= 80V*⁴ connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C (t >40 °C derating), RMS current: 5 A → 4.1 Aeff, 4.3 A → 3.5 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*⁵ default value*⁶ Input voltage must not exceed Electronic supply voltage Ue

Additional technical data are available in mcManual.




miControl® GmbH

Chausseestraße 34

14979 Großbeeren (bei Berlin)

Copyright 2024 by miControl® - Modifications and errors excepted
mcDSA-E67-EtherCAT - PV1.13.00.00 / DV1.00.00.06
Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

Scheme

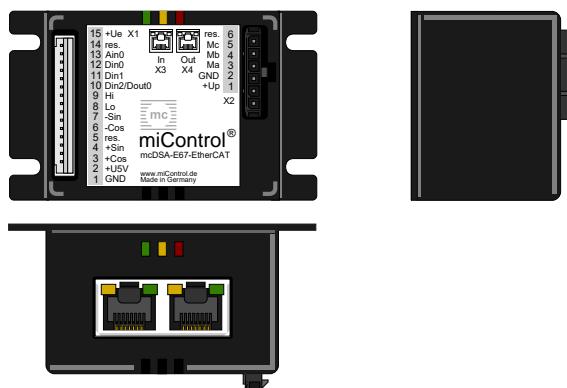

©2023 by miControl

Terminal assignment

X1 Encoder, I/O's and CAN		
1	GND	Ground for sensor supply Notice: don't connect with system GND
2	+U5V	5V output voltage for sensor supply Sensors: encoder
3	+Cos	Encoder, plus cosine signal
4	+Sin	Encoder, plus sine signal
5	res.	Reserved
6	-Cos	Encoder, minus cosine signal
7	-Sin	Encoder, minus sine signal
8	CAN Lo	CAN Low
9	CAN Hi	CAN High
10	Din2/Dout0	Digital input 2 / Digital output 0
11	Din1	Digital input 1
12	Din0	Digital input 0
13	Ain0	Analog input 0
14	res.	Reserved
15	+Ue	Electronic supply voltage
X2 Motor		
1	+Up	Power supply voltage
2	GND	Ground for power supply voltage
3	Ma	Motor phase A
4	Mb	Motor phase B
5	Mc	Motor phase C
6	res.	Reserved
X3 EtherCAT - In port		
-	In	In
X4 EtherCAT - Out port		
-	Out	Out